
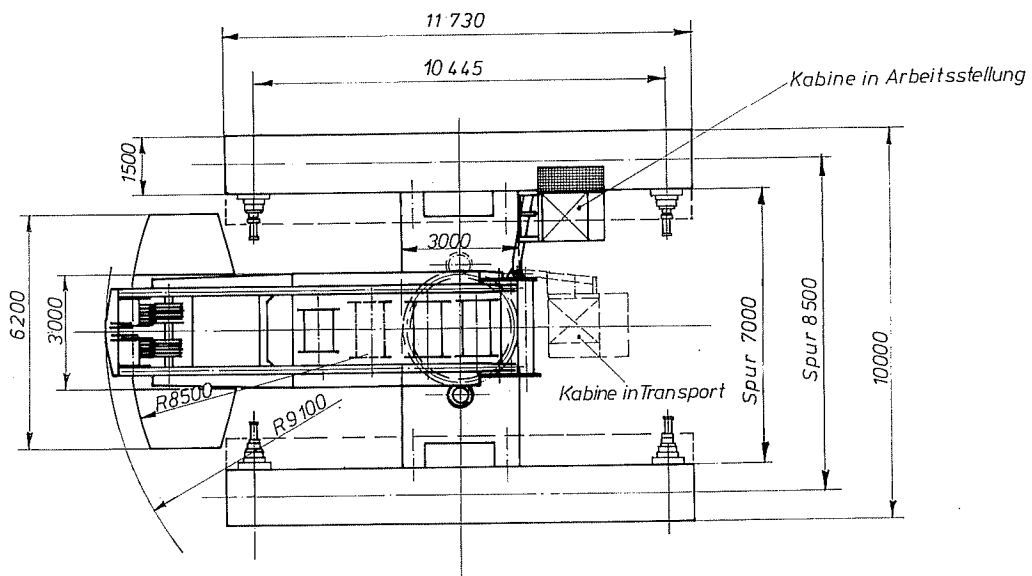


550t クローラークレーン LIEBHERR LR-1550

■概略図

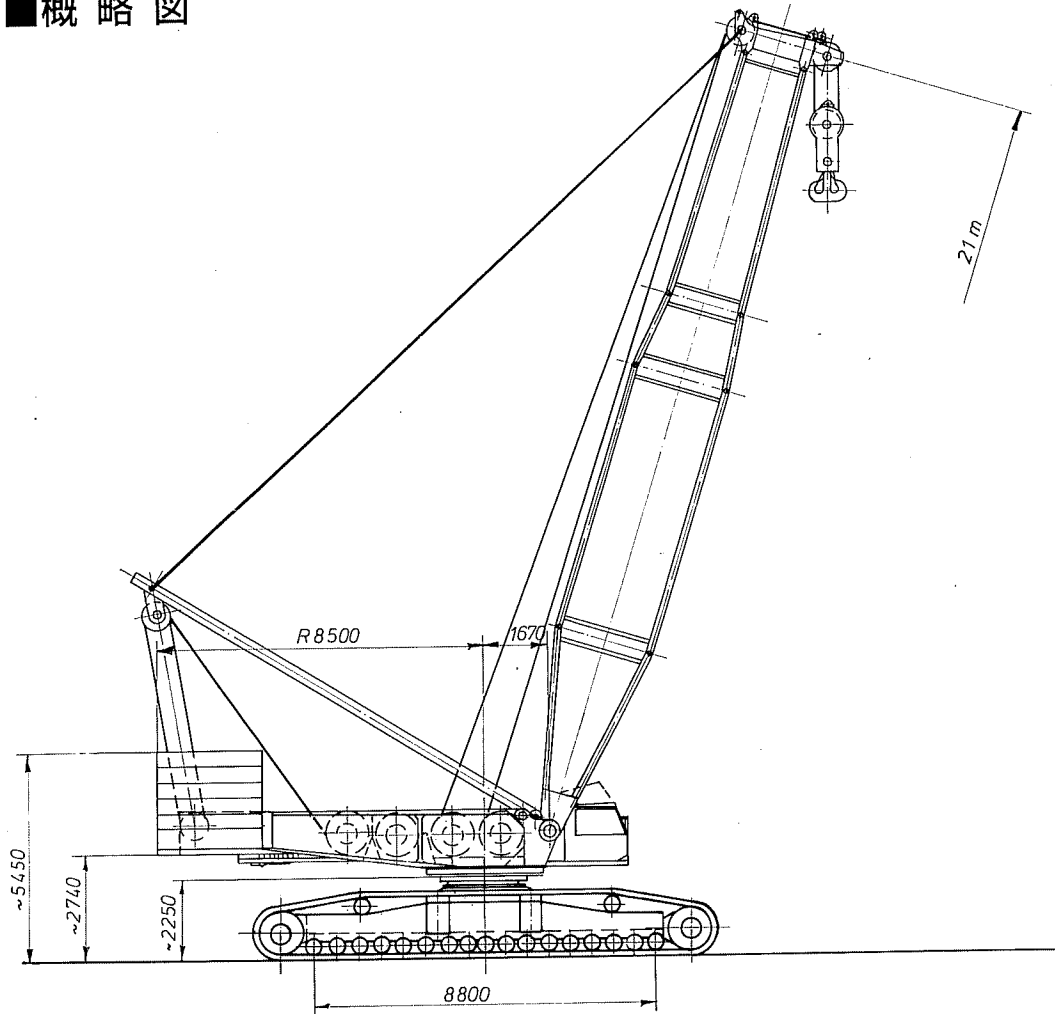

LIEBHERR LR-1550

75 %
DIN
BS

LR-1550

レーブーム

クローラー有効長さ：8.80m
クローラー中心距離：8.50m
クローラーシュー幅：1.50m
クレーン水平設置
センターカウンターウエイト 30t
カウンターウエイト 160t



360°

TAB 50007 160t

| 作業半径 | L-21 | L-28 | L-35 | L-42 | L-49 | L-56 | L-63 | L-70 | L-77 | L-84 | L-91 | L-98 | L-105 |
|------|------|------|------|------|------|------|------|------|------|------|------|------|-------|
| 4.5 | 550* | | | | | | | | | | | | |
| 5.0 | 500* | | | | | | | | | | | | |
| 5.5 | 461* | 400* | | | | | | | | | | | |
| 6.0 | 426* | 380* | 330* | | | | | | | | | | |
| 6.5 | 395* | 365* | 322* | | | | | | | | | | |
| 7 | 369* | 350* | 315* | 275* | | | | | | | | | |
| 8 | 325* | 324* | 301* | 264* | 235* | 200 | | | | | | | |
| 9 | 291* | 290* | 289* | 255* | 227 | 193 | 160 | | | | | | |
| 10 | 263* | 262* | 261* | 245 | 219 | 186 | 155 | 130 | 113 | | | | |
| 11 | 239* | 238* | 237* | 235 | 211 | 180 | 150 | 125 | 109 | 95 | 82 | | |
| 12 | 220* | 219* | 218 | 216 | 203 | 173 | 145 | 121 | 106 | 92 | 79 | 68 | |
| 14 | 188* | 187 | 186 | 182 | 173 | 161 | 135 | 114 | 100 | 87 | 74 | 64 | 55 |
| 16 | 162 | 161 | 160 | 156 | 149 | 142 | 126 | 107 | 95 | 82 | 70 | 60 | 52 |
| 18 | 137 | 137 | 137 | 136 | 130 | 125 | 117 | 102 | 90 | 78 | 66 | 57 | 49 |
| 20 | 118 | 118 | 118 | 117 | 115 | 111 | 106 | 97 | 86 | 75 | 63 | 55 | 46 |
| 22 | | 103 | 103 | 102 | 101 | 99 | 95 | 91 | 82 | 71 | 60 | 52 | 44 |
| 24 | | 92 | 91 | 90 | 89 | 89 | 86 | 82 | 78 | 68 | 58 | 50 | 42 |
| 26 | | 82 | 82 | 81 | 80 | 79 | 78 | 74 | 71 | 65 | 56 | 47 | 40 |
| 28 | | | 74 | 73 | 72 | 71 | 70 | 68 | 65 | 62 | 53 | 45 | 38 |
| 30 | | | 67 | 66 | 65 | 64 | 64 | 62 | 59 | 56 | 51 | 44 | 37 |
| 32 | | | 61 | 60 | 59 | 59 | 58 | 57 | 54 | 52 | 49 | 42 | 35 |
| 34 | | | | 55 | 54 | 54 | 53 | 52 | 50 | 47.5 | 45.5 | 41 | 34 |
| 36 | | | | 51 | 50 | 49.5 | 48.5 | 47 | 46 | 43.5 | 42 | 39 | 32 |
| 38 | | | | 47.5 | 46.5 | 45.5 | 44.5 | 43.5 | 42.5 | 40 | 38.5 | 36.5 | 31 |
| 40 | | | | 43 | 42 | 41 | 41 | 40 | 39 | 37 | 35.5 | 34 | 30.0 |
| 44 | | | | | 37.5 | 36.5 | 35.5 | 34 | 33 | 32 | 30 | 28.6 | 27.2 |
| 48 | | | | | | 32 | 30.5 | 29.4 | 28.5 | 27.4 | 25.8 | 24.3 | 22.9 |
| 52 | | | | | | | 26.9 | 25.5 | 24.6 | 23.3 | 21.9 | 20.5 | 19.2 |
| 56 | | | | | | | 23.7 | 22.3 | 21.1 | 19.8 | 18.4 | 17.0 | 15.7 |
| 60 | | | | | | | | 19.3 | 18.1 | 16.8 | 15.4 | 13.9 | 12.6 |
| 64 | | | | | | | | | 15.5 | 14.2 | 12.8 | 11.3 | 9.9 |
| 68 | | | | | | | | | 13.3 | 12.0 | 10.5 | 9.0 | 7.5 |
| 72 | | | | | | | | | | 10.0 | 8.5 | 7.0 | 5.7 |
| 76 | | | | | | | | | | | 6.8 | 5.5 | 4.2 |
| 80 | | | | | | | | | | | 5.5 | 4.1 | |
| 風速 | 14.0 | 14.0 | 14.0 | 14.0 | 13.0 | 13.0 | 13.0 | 11.0 | 11.0 | 11.0 | 9.0 | 9.0 | 9.0 |

定格荷重：(t)

作業半径、ブーム長さ：(m)

風速：(m/s)

システム：LA 2824.10 LI 2419.10

定格総荷重 350t 以上については追加装備が必要です。

*センターカウンターウエイト 60t を追加し、90t にする必要があります。

仕様は変更になることがあります。

LIEBHERR LR-1550

LN^{87°}

TAB 50038.1 160t

75%
DIN
BS

LR1550
LN-操作

起伏式ジブ
ブーム角度 87°
クローラー長さ: 8.80m
クローラー中心距離: 8.50m
クローラーシュー幅: 1.50m
クレーン水平設置
センターカウンターウエイト 30t
風力 50n/m² (9m/sec)
カウンターウエイト 160t

定格荷重: (t)

作業半径、ブーム長さ: (m)

システム: LA 2419.10 LI 2116.10

仕様は変更になることがあります。

| 作業半径 | L-28 N-21 | L-28 N-28 | L-28 N-35 | L-28 N-42 | L-28 N-49 | L-28 N-56 | L-28 N-63 | L-28 N-70 | L-28 N-77 | L-28 N-84 | L-28 N-91 |
|------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| 12 | 130 | | | | | | | | | | |
| 14 | 130 | 122 | | | | | | | | | |
| 16 | 128 | 118 | | | | | | | | | |
| 18 | 122 | 114 | 107 | 91 | | | | | | | |
| 20 | 117 | 110 | 101 | 87 | 76 | 60 | | | | | |
| 22 | 108 | 106 | 98 | 84 | 71 | 58 | 51 | | | | |
| 24 | 78 | 98 | 95 | 82 | 69 | 56 | 50 | 41 | | | |
| 26 | | 88 | 87 | 79 | 67 | 55 | 49 | 40 | 33 | | |
| 28 | | 80 | 79 | 77 | 65 | 54 | 48 | 39.5 | 32 | 28.0 | |
| 30 | | 65 | 72 | 72 | 63 | 52 | 46.5 | 38.5 | 31.5 | 27.3 | 23.6 |
| 32 | | | 67 | 65 | 60 | 51 | 45.5 | 37.5 | 31 | 26.7 | 23.1 |
| 34 | | | 61 | 61 | 58 | 49.5 | 44 | 36.5 | 30.5 | 26.1 | 22.5 |
| 36 | | | 54 | 56 | 56 | 48 | 43 | 36 | 29.8 | 25.6 | 22.0 |
| 38 | | | 43.5 | 52 | 53 | 46.5 | 42 | 35 | 29.3 | 25.0 | 21.6 |
| 40 | | | 48 | 49.5 | 45.5 | 40.5 | 34 | 28.7 | 24.5 | 21.1 | |
| 44 | | | | 34.5 | 43.5 | 42.5 | 38.5 | 32.5 | 27.5 | 23.5 | 20.3 |
| 48 | | | | | 35 | 38 | 36 | 31 | 26.4 | 22.5 | 19.5 |
| 52 | | | | | | 33.5 | 33.5 | 29.5 | 25.3 | 21.6 | 18.7 |
| 56 | | | | | | 25.8 | 30 | 28.0 | 24.2 | 20.7 | 18.0 |
| 60 | | | | | | | 25.7 | 26.4 | 23.2 | 19.9 | 17.4 |
| 64 | | | | | | | 19.8 | 23.9 | 22.2 | 19.2 | 16.7 |
| 68 | | | | | | | | 19.2 | 21.4 | 18.5 | 16.1 |
| 72 | | | | | | | | | 18.9 | 17.8 | 15.5 |
| 76 | | | | | | | | | 15.2 | 17.2 | 15.0 |
| 80 | | | | | | | | | | 14.7 | 14.4 |
| 84 | | | | | | | | | | 11.6 | 13.9 |
| 88 | | | | | | | | | | | 10.8 |

| 作業半径 | L-35 N-21 | L-35 N-28 | L-35 N-35 | L-35 N-42 | L-35 N-49 | L-35 N-56 | L-35 N-63 | L-35 N-70 | L-35 N-77 | L-35 N-84 | L-35 N-91 |
|------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| 12 | 130 | | | | | | | | | | |
| 14 | 129 | 114 | | | | | | | | | |
| 16 | 122 | 110 | 101 | 86 | | | | | | | |
| 18 | 117 | 107 | 98 | 84 | 71 | | | | | | |
| 20 | 112 | 102 | 94 | 81 | 69 | 58 | | | | | |
| 22 | 108 | 99 | 91 | 79 | 67 | 56 | 48.5 | | | | |
| 24 | 85 | 96 | 88 | 76 | 65 | 55 | 47.5 | 39 | | | |
| 26 | | 90 | 85 | 74 | 63 | 53 | 46.5 | 38 | 32 | | |
| 28 | | 81 | 81 | 72 | 61 | 52 | 45 | 37.5 | 31.5 | 26.5 | |
| 30 | | 69 | 74 | 69 | 59 | 51 | 44 | 36.5 | 31 | 26.0 | 22.5 |
| 32 | | | 68 | 67 | 57 | 49.5 | 43 | 36 | 30.5 | 25.5 | 22.0 |
| 34 | | | 62 | 62 | 55 | 46 | 42 | 35 | 29.6 | 25.0 | 21.5 |
| 36 | | | 57 | 57 | 53 | 47 | 41 | 34.5 | 29.0 | 24.6 | 21.1 |
| 38 | | | 47 | 53 | 51 | 45.5 | 40 | 33.5 | 28.5 | 24.1 | 20.6 |
| 40 | | | | 49.5 | 49.5 | 44 | 39 | 33 | 28.0 | 23.6 | 20.2 |
| 44 | | | | 37 | 43.5 | 41 | 36.5 | 31.5 | 26.8 | 22.8 | 19.4 |
| 48 | | | | | 37 | 38.5 | 34.5 | 30.0 | 25.7 | 22.0 | 18.7 |
| 52 | | | | | | 34.5 | 32.5 | 28.5 | 24.6 | 21.1 | 18.0 |
| 56 | | | | | | 27.7 | 30.5 | 27.0 | 23.6 | 20.3 | 17.3 |
| 60 | | | | | | | 27.7 | 25.5 | 22.6 | 19.6 | 16.6 |
| 64 | | | | | | | 21.6 | 24.0 | 21.7 | 18.9 | 16.0 |
| 68 | | | | | | | | 20.8 | 20.8 | 18.1 | 15.4 |
| 72 | | | | | | | | | 19.9 | 17.4 | 14.8 |
| 76 | | | | | | | | | 16.1 | 16.7 | 14.2 |
| 80 | | | | | | | | | | 15.6 | 13.6 |
| 84 | | | | | | | | | | 12.3 | 13.0 |
| 88 | | | | | | | | | | | 11.6 |

LN^{87°}

TAB 50038.2 160t

75%
DIN
BS

LR1550
LN-操作

起伏式ジブ
ブーム角度 87°
クローラー長さ: 8.80m
クローラー中心距離: 8.50m
クローラーシュー幅: 1.50m
クレーン水平設置
センターカウンターウエイト 30t
風力 50n/m² (9m/sec)
カウンターウエイト 160t

定格荷重: (t)

作業半径、ブーム長さ: (m)

システム: LA 2419.10 LI 2116.10

仕様は変更になることがあります。

| 作業半径 | L-42 N-21 | L-42 N-28 | L-42 N-35 | L-42 N-42 | L-42 N-49 | L-42 N-56 | L-42 N-63 | L-42 N-70 | L-42 N-77 | L-42 N-84 | L-42 N-91 |
|------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| 14 | 120 | 106 | | | | | | | | | |
| 16 | 115 | 103 | 96 | | | | | | | | |
| 18 | 110 | 100 | 92 | 79 | | | | | | | |
| 20 | 105 | 96 | 88 | 76 | 65 | | | | | | |
| 22 | 102 | 93 | 85 | 74 | 63 | 55 | | | | | |
| 24 | 91 | 89 | 82 | 71 | 61 | 53 | 45 | 37 | | | |
| 26 | | 86 | 78 | 69 | 59 | 52 | 44 | 36.5 | 30.5 | | |
| 28 | | 82 | 75 | 67 | 57 | 50 | 43 | 36 | 30.0 | 25.0 | |
| 30 | | 73 | 73 | 65 | 55 | 49 | 42 | 35 | 29.5 | 24.7 | 21.5 |
| 32 | | 56 | 69 | 62 | 54 | 47.5 | 41 | 34.5 | 29.0 | 24.4 | 21.0 |
| 34 | | | 63 | 60 | 52 | 46.5 | 40 | 33.5 | 28.5 | 24.0 | 20.6 |
| 36 | | | 59 | 58 | 50 | 45 | 39 | 33 | 28.0 | 23.6 | 20.2 |
| 38 | | | 50 | 54 | 49 | 43.5 | 38 | 32.5 | 27.5 | 23.2 | 19.8 |
| 40 | | | | 50 | 47 | 42 | 37 | 31.5 | 27.0 | 22.8 | 19.5 |
| 44 | | | | 39 | 43.5 | 39.5 | 35 | 30.0 | 26.0 | 22.2 | 18.7 |
| 48 | | | | | 38.5 | 37 | 33 | 29.0 | 25.2 | 21.5 | 18.0 |
| 52 | | | | | | 34.5 | 31 | 27.5 | 24.2 | 20.7 | 17.3 |
| 56 | | | | | | 28.8 | 29.0 | 26.0 | 23.2 | 20.0 | 16.6 |
| 60 | | | | | | | 27.5 | 24.5 | 22.3 | 19.3 | 15.9 |
| 64 | | | | | | | 22.6 | 23.3 | 21.4 | 18.6 | 15.3 |
| 68 | | | | | | | | 21.7 | 20.4 | 17.9 | 14.6 |
| 72 | | | | | | | | | 19.4 | 17.1 | 14.0 |
| 76 | | | | | | | | | 16.9 | 16.3 | 13.5 |
| 80 | | | | | | | | | | 15.6 | 13.0 |
| 84 | | | | | | | | | | 13.0 | 12.5 |
| 88 | | | | | | | | | | | 12.0 |

| 作業半径 | L-49 N-21 | L-49 N-28 | L-49 N-35 | L-49 N-42 | L-49 N-49 | L-49 N-56 | L-49 N-63 | L-49 N-70 | L-49 N-77 | L-49 N-84 | L-49 N-91 |
|------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| 14 | 114 | 100 | | | | | | | | | |
| 16 | 108 | 96 | 86 | | | | | | | | |
| 18 | 103 | 93 | 83 | 72 | | | | | | | |
| 20 | 98 | 89 | 80 | 70 | 60 | | | | | | |
| 22 | 95 | 86 | 77 | 68 | 59 | 51 | | | | | |
| 24 | 92 | 83 | 74 | 65 | 56 | 49 | 41.5 | 33.5 | | | |
| 26 | | 80 | 71 | 63 | 54 | 47.5 | 40.5 | 33 | 27.7 | | |
| 28 | | 77 | 68 | 61 | 52 | 46 | 39.5 | 32.5 | 27.2 | 22.5 | |
| 30 | | 74 | 65 | 59 | 51 | 45 | 38.5 | 32 | 26.7 | 22.0 | 18.7 |
| 32 | | 59 | 64 | 57 | 49.5 | 44 | 38 | 31.5 | 26.3 | 21.7 | 18.2 |
| 34 | | | 62 | 55 | 48 | 43 | 37 | 31 | 25.8 | 21.3 | 17.8 |
| 36 | | | 60 | 53 | 46.5 | 41.5 | 36 | 30.5 | 25.4 | 20.9 | 17.5 |
| 38 | | | 53 | 51 | 45.5 | 40.5 | 35 | 29.8 | 25.0 | 20.6 | 17.1 |
| 40 | | | | 50 | 44 | 39 | 34 | 29.0 | 24.5 | 20.2 | 16.8 |
| 44 | | | | 40 | 41.5 | 37 | 32 | 27.7 | 23.7 | 19.6 | 16.1 |
| 48 | | | | | 39 | 34.5 | 30.5 | 26.6 | 22.9 | 18.9 | 15.5 |
| 52 | | | | | 29.5 | 32.5 | 28.8 | 25.2 | 22.0 | 18.2 | 14.9 |
| 56 | | | | | | 29.8 | 27.0 | 24.0 | 21.1 | 17.6 | 14.3 |
| 60 | | | | | | | 25.4 | 22.6 | 20.3 | 17.0 | 13.8 |
| 64 | | | | | | | 23.5 | 21.4 | 19.5 | 16.4 | 13.2 |
| 68 | | | | | | | | 20.2 | 18.6 | 15.7 | 12.8 |
| 72 | | | | | | | | 18.7 | 17.7 | 15.1 | 12.3 |
| 76 | | | | | | | | | 17.0 | 14.5 | 11.8 |
| 80 | | | | | | | | | | 14.0 | 11.4 |
| 84 | | | | | | | | | | 13.4 | 11.0 |
| 88 | | | | | | | | | | | 10.6 |

LIEBHERR LR-1550

LN^{87°}

TAB 50038.3 160t

75%
DIN
BS

LR1550
LN-操作

起伏式ジブ
ブーム角度 87°
クローラー長さ: 8.80m
クローラー中心距離: 8.50m
クローラーシュー幅: 1.50m
クレーン水平設置
センターカウンターウエイト 30t
風力 50n/m² (9m/sec)
カウンターウエイト 160t

| 作業半径 | L-56 N-21 | L-56 N-28 | L-56 N-35 | L-56 N-42 | L-56 N-49 | L-56 N-56 | L-56 N-63 | L-56 N-70 | L-56 N-77 | L-56 N-84 | L-56 N-91 |
|------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| 14 | 105 | | | | | | | | | | |
| 16 | 100 | 88 | 76 | | | | | | | | |
| 18 | 96 | 85 | 73 | 64 | | | | | | | |
| 20 | 92 | 82 | 71 | 63 | 54 | | | | | | |
| 22 | 89 | 79 | 68 | 61 | 52 | 46 | | | | | |
| 24 | 86 | 76 | 66 | 59 | 51 | 44.5 | 38.5 | | | | |
| 26 | 83 | 73 | 64 | 57 | 48.5 | 43.5 | 37.5 | 30.0 | 25.0 | | |
| 28 | 80 | 71 | 61 | 55 | 48 | 42.5 | 36.5 | 29.5 | 24.4 | 20.0 | |
| 30 | 78 | 68 | 59 | 54 | 46.5 | 41.5 | 35.5 | 29.0 | 24.0 | 19.4 | 16.0 |
| 32 | | 63 | 57 | 52 | 45 | 40.5 | 35 | 28.7 | 23.6 | 19.0 | 15.7 |
| 34 | | | 56 | 50 | 44 | 39.5 | 34 | 28.3 | 23.2 | 18.6 | 15.4 |
| 36 | | | 54 | 49 | 43 | 38.5 | 33.5 | 27.7 | 22.8 | 18.3 | 15.1 |
| 38 | | | 53 | 47.5 | 42 | 37.5 | 32.5 | 27.2 | 22.4 | 18.0 | 14.8 |
| 40 | | | | 46 | 41 | 36.5 | 31.5 | 26.6 | 22.0 | 17.6 | 14.5 |
| 44 | | | | 41 | 39.5 | 34.5 | 30.0 | 25.4 | 21.4 | 17.0 | 14.0 |
| 48 | | | | | 37 | 32.5 | 28.4 | 24.2 | 20.6 | 16.4 | 13.4 |
| 52 | | | | | 30.5 | 30.5 | 26.6 | 23.0 | 19.8 | 15.8 | 12.9 |
| 56 | | | | | | 28.5 | 25.0 | 22.0 | 19.0 | 15.3 | 12.3 |
| 60 | | | | | | | 23.3 | 20.8 | 18.3 | 14.7 | 11.8 |
| 64 | | | | | | | 21.6 | 19.6 | 17.6 | 14.2 | 11.4 |
| 68 | | | | | | | | 18.4 | 16.9 | 13.7 | 10.9 |
| 72 | | | | | | | | 17.4 | 16.1 | 13.2 | 10.5 |
| 76 | | | | | | | | | 15.4 | 12.8 | 10.1 |
| 80 | | | | | | | | | | 12.4 | 9.8 |
| 84 | | | | | | | | | | 12.0 | 9.4 |
| 88 | | | | | | | | | | | 9.2 |
| 92 | | | | | | | | | | | 9.0 |

定格荷重: (t)

作業半径、ブーム長さ: (m)

システム: LA 2419.10 LI 2116.10

仕様は変更になることがあります。

| 作業半径 | L-63 N-28 | L-63 N-35 | L-63 N-42 | L-63 N-49 | L-63 N-56 | L-63 N-63 | L-63 N-70 | L-63 N-77 | L-63 N-84 | L-63 N-91 |
|------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| 14 | 79 | | | | | | | | | |
| 16 | 76 | | | | | | | | | |
| 18 | 73 | 66 | 57 | | | | | | | |
| 20 | 70 | 64 | 55 | 47 | | | | | | |
| 22 | 67 | 61 | 53 | 46 | 40 | | | | | |
| 24 | 65 | 59 | 52 | 45 | 39 | 33 | | | | |
| 26 | 63 | 57 | 50 | 43.5 | 38 | 32.5 | 28.5 | | | |
| 28 | 61 | 55 | 49 | 42.5 | 37 | 32 | 28.0 | 24.0 | 18.0 | |
| 30 | 60 | 53 | 47.5 | 41.5 | 36 | 31.5 | 27.5 | 23.5 | 17.5 | |
| 32 | 58 | 51 | 46 | 40.5 | 35.5 | 30.5 | 27.0 | 23.1 | 17.2 | 14.2 |
| 34 | | 49 | 44.5 | 39.5 | 34.5 | 30.0 | 26.5 | 22.7 | 17.0 | 13.9 |
| 36 | | 47.5 | 43 | 38 | 33.5 | 29.5 | 26.0 | 22.3 | 16.8 | 13.6 |
| 38 | | 46 | 41.5 | 37 | 32.5 | 28.8 | 25.5 | 21.9 | 16.5 | 13.4 |
| 40 | | | 40 | 36 | 32 | 28.2 | 25.0 | 21.5 | 16.2 | 13.2 |
| 44 | | | 38 | 34 | 30.5 | 27.0 | 24.0 | 20.7 | 15.6 | 12.7 |
| 48 | | | | 32 | 28.6 | 25.6 | 22.9 | 20.0 | 15.1 | 12.2 |
| 52 | | | | 29.6 | 27.0 | 24.4 | 21.8 | 19.2 | 14.6 | 11.7 |
| 56 | | | | | 25.5 | 23.0 | 20.8 | 18.4 | 14.0 | 11.3 |
| 60 | | | | | | 21.8 | 19.8 | 17.6 | 13.5 | 10.8 |
| 64 | | | | | | 20.6 | 18.8 | 16.8 | 13.0 | 10.3 |
| 68 | | | | | | | 17.8 | 16.0 | 12.4 | 9.8 |
| 72 | | | | | | | 16.8 | 15.2 | 11.8 | 9.3 |
| 76 | | | | | | | | 14.5 | 11.2 | 8.9 |
| 80 | | | | | | | | | 10.8 | 8.4 |
| 84 | | | | | | | | | 10.2 | 7.9 |
| 88 | | | | | | | | | | 7.5 |
| 92 | | | | | | | | | | 7.0 |

LN^{87°}

TAB 50038.4 160t

75%
DIN
BS

LR1550
LN-操作

起伏式ジブ
ブーム角度 87°
クローラー長さ: 8.80m
クローラー中心距離: 8.50m
クローラーシュー幅: 1.50m
クレーン水平設置
センターカウンターウエイト 30t
風力 50n/m² (9m/sec)
カウンターウエイト 160t

| 作業半径 | L-70 N-28 | L-70 N-35 | L-70 N-42 | L-70 N-49 | L-70 N-56 | L-70 N-63 | L-70 N-70 | L-70 N-77 | L-70 N-84 | L-70 N-91 |
|------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| 16 | 71 | | | | | | | | | |
| 18 | 68 | 61 | | | | | | | | |
| 20 | 66 | 58 | 49 | | | | | | | |
| 22 | 63 | 56 | 48 | 43 | 37.5 | | | | | |
| 24 | 61 | 54 | 47 | 41.5 | 36.5 | 31 | | | | |
| 26 | 59 | 52 | 45.5 | 40 | 35.5 | 30.5 | 25.0 | | | |
| 28 | 57 | 50 | 44 | 39 | 34.5 | 30.0 | 24.6 | 19.5 | | |
| 30 | 55 | 48 | 43 | 38 | 33.5 | 29.5 | 24.2 | 19.2 | 15.6 | |
| 32 | 53 | 47 | 42 | 37 | 33 | 28.8 | 23.8 | 18.9 | 15.4 | 12.8 |
| 34 | | 45 | 41 | 36 | 32 | 28.2 | 23.2 | 18.6 | 15.1 | 12.6 |
| 36 | | 44 | 40 | 35 | 31 | 27.6 | 22.8 | 18.3 | 14.9 | 12.4 |
| 38 | | 42 | 39 | 34 | 30.5 | 26.9 | 22.4 | 18.0 | 14.6 | 12.2 |
| 40 | | 40 | 38 | 33 | 30.0 | 26.3 | 22.0 | 17.8 | 14.4 | 12.0 |
| 44 | | | 35.5 | 31.5 | 28.4 | 25.1 | 21.0 | 17.2 | 13.9 | 11.6 |
| 48 | | | | 30.0 | 26.8 | 23.9 | 20.0 | 16.6 | 13.5 | 11.2 |
| 52 | | | | 28.5 | 25.4 | 22.7 | 19.2 | 16.0 | 13.0 | 10.9 |
| 56 | | | | | 24.0 | 21.6 | 18.4 | 15.4 | 12.5 | 10.4 |
| 60 | | | | | | 20.5 | 17.6 | 14.8 | 12.0 | 10.0 |
| 64 | | | | | | 19.5 | 16.8 | 14.2 | 11.5 | 9.6 |
| 68 | | | | | | | 16.0 | 13.7 | 11.0 | 9.2 |
| 72 | | | | | | | 15.2 | 13.1 | 10.5 | 8.8 |
| 76 | | | | | | | | 12.5 | 10.0 | 8.4 |
| 80 | | | | | | | | | 9.5 | 8.0 |
| 84 | | | | | | | | | 9.0 | 7.6 |
| 88 | | | | | | | | | | 7.2 |
| 92 | | | | | | | | | | 6.8 |

定格荷重: (t)

作業半径、ブーム長さ: (m)

システム: LA 2419.10 LI 2116.10

仕様は変更になることがあります。

| 作業半径 | L-77 N-28 | L-77 N-35 | L-77 N-42 | L-77 N-49 | L-77 N-56 | L-77 N-63 | L-77 N-70 | L-77 N-77 | L-77 N-84 | L-77 N-91 |
|------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| 16 | 62 | | | | | | | | | |
| 18 | 60 | 52 | | | | | | | | |
| 20 | 58 | 51 | 44 | | | | | | | |
| 22 | 56 | 49 | 43 | 36.5 | 32 | | | | | |
| 24 | 54 | 47 | 41.5 | 35.5 | 31 | 26.6 | | | | |
| 26 | 52 | 46 | 40 | 35 | 30.5 | 26.0 | 21.5 | | | |
| 28 | 51 | 44 | 39 | 34 | 30.0 | 25.5 | 21.0 | 16.6 | | |
| 30 | 49 | 43 | 38 | 33 | 29.0 | 25.0 | 20.6 | 16.4 | 13.5 | |
| 32 | 47 | 42 | 37 | 32.5 | 28.5 | 24.5 | 20.2 | 16.1 | 13.3 | 10.8 |
| 34 | 46 | 40 | 36 | 32 | 27.8 | 23.8 | 19.8 | 15.8 | 13.1 | 10.6 |
| 36 | | 39 | 35 | 31 | 27.2 | 23.2 | 19.4 | 15.6 | 12.9 | 10.4 |
| 38 | | 38 | 34 | 30.5 | 26.6 | 22.8 | 19.0 | 15.3 | 12.7 | 10.2 |
| 40 | | 37 | 33 | 29.5 | 26.0 | 22.2 | 18.6 | 15.1 | 12.5 | 10.0 |
| 44 | | | 31.5 | 28.0 | 24.8 | 21.2 | 18.0 | 14.6 | 12.1 | 9.6 |
| 48 | | | | 26.5 | 23.4 | 20.2 | 17.2 | 14.0 | 11.7 | 9.3 |
| 52 | | | | 25.0 | 22.2 | 19.2 | 16.4 | 13.5 | 11.3 | 9.0 |
| 56 | | | | | 21.1 | 18.2 | 15.6 | 13.0 | 10.9 | 8.6 |
| 60 | | | | | 20.0 | 17.2 | 14.8 | 12.5 | 10.5 | 8.2 |
| 64 | | | | | | 16.2 | 14.0 | 12.0 | 10.1 | 7.9 |
| 68 | | | | | | | 13.4 | 11.5 | 9.7 | 7.6 |
| 72 | | | | | | | 12.6 | 11.0 | 9.3 | 7.2 |
| 76 | | | | | | | | 10.5 | 8.9 | 6.9 |
| 80 | | | | | | | | 10.0 | 8.5 | 6.6 |
| 84 | | | | | | | | | 8.1 | 6.2 |
| 88 | | | | | | | | | | 5.8 |
| 92 | | | | | | | | | | 5.4 |

LIEBHERR LR-1550

LN^{77°}

TAB 50042.1 160t

75%
DIN
BS

LR1550
LN-操作

起伏式ジブ
ブーム角度 77°
クローラー長さ: 8.80m
クローラー中心距離: 8.50m
クローラーシュー幅: 1.50m
クレーン水平設置
センターカウンターウエイト 30t
風力 50n/m² (9m/sec)
カウンターウエイト 160t

定格荷重: (t)

作業半径、ブーム長さ: (m)

システム: LA 2419.10 LI 2116.10

仕様は変更になることがあります。

| 作業半径 | L-28 N-21 | L-28 N-28 | L-28 N-35 | L-28 N-42 | L-28 N-49 | L-28 N-56 | L-28 N-63 | L-28 N-70 | L-28 N-77 | L-28 N-84 | L-28 N-91 |
|------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| 20 | 122 | | | | | | | | | | |
| 22 | 108 | 106 | | | | | | | | | |
| 24 | 97 | 96 | | | | | | | | | |
| 26 | 87 | 87 | 86 | | | | | | | | |
| 28 | 79 | 79 | 79 | 78 | | | | | | | |
| 30 | 73 | 72 | 72 | 71 | 66 | | | | | | |
| 32 | | 67 | 66 | 66 | 64 | | | | | | |
| 34 | | 62 | 61 | 61 | 61 | 54 | | | | | |
| 36 | | 58 | 57 | 57 | 56 | 52 | 44.5 | | | | |
| 38 | | | 54 | 53 | 53 | 51 | 43.5 | | | | |
| 40 | | | | 50 | 49.5 | 49 | 42.5 | 36 | | | |
| 44 | | | 44.5 | 44 | 43.5 | 40.5 | 34.5 | 29.0 | | | |
| 48 | | | | 39.5 | 39 | 38.5 | 33 | 28.0 | | | |
| 52 | | | | | 35 | 34.5 | 31.5 | 27.0 | 23.2 | | |
| 56 | | | | | 32.5 | 32 | 31.5 | 30.0 | 26.0 | 24.0 | 22.5 |
| 60 | | | | | | 29.2 | 28.7 | 28.4 | 25.0 | 21.5 | 18.3 |
| 64 | | | | | | 24.0 | 26.4 | 26.0 | 24.1 | 20.8 | 17.6 |
| 68 | | | | | | | 24.3 | 23.9 | 23.2 | 20.0 | 17.0 |
| 72 | | | | | | | 17.6 | 22.1 | 21.5 | 19.3 | 16.4 |
| 76 | | | | | | | | 19.4 | 19.9 | 18.6 | 15.7 |
| 80 | | | | | | | | | 18.3 | 17.9 | 15.2 |
| 84 | | | | | | | | | 14.7 | 16.7 | 14.6 |
| 88 | | | | | | | | | | 15.2 | 14.0 |
| 92 | | | | | | | | | | 11.4 | 13.3 |
| 96 | | | | | | | | | | | 13.6 |
| 100 | | | | | | | | | | | 11.6 |

| 作業半径 | L-35 N-21 | L-35 N-28 | L-35 N-35 | L-35 N-42 | L-35 N-49 | L-35 N-56 | L-35 N-63 | L-35 N-70 | L-35 N-77 | L-35 N-84 | L-35 N-91 |
|------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| 20 | | | | | | | | | | | |
| 22 | 105 | | | | | | | | | | |
| 24 | 95 | 93 | | | | | | | | | |
| 26 | 86 | 85 | 83 | | | | | | | | |
| 28 | 78 | 78 | 77 | | | | | | | | |
| 30 | 72 | 71 | 71 | 69 | 63 | | | | | | |
| 32 | 66 | 66 | 65 | 65 | 61 | | | | | | |
| 34 | | 61 | 61 | 60 | 59 | 52 | | | | | |
| 36 | | 57 | 56 | 56 | 55 | 50 | 44 | | | | |
| 38 | | 53 | 53 | 52 | 52 | 49 | 43 | | | | |
| 40 | | | 49.5 | 49 | 48.5 | 47.5 | 42 | 35 | | | |
| 44 | | | 44 | 43.5 | 43 | 42.5 | 40 | 33.5 | 28.2 | | |
| 48 | | | | 39 | 38.5 | 38 | 37.5 | 32 | 27.2 | 22.8 | |
| 52 | | | | 35 | 34.5 | 34.5 | 34 | 30.5 | 26.2 | 22.0 | 19.0 |
| 56 | | | | | 31 | 31.5 | 31 | 29.5 | 25.2 | 21.2 | 18.0 |
| 60 | | | | | | 28.6 | 28.1 | 27.7 | 24.2 | 20.5 | 17.2 |
| 64 | | | | | | | 26.3 | 25.8 | 25.4 | 23.2 | 19.8 |
| 68 | | | | | | | | 23.8 | 23.4 | 22.2 | 19.2 |
| 72 | | | | | | | | 22.0 | 21.6 | 20.9 | 18.6 |
| 76 | | | | | | | | | 20.0 | 19.3 | 18.0 |
| 80 | | | | | | | | | 16.5 | 17.9 | 17.3 |
| 84 | | | | | | | | | | 16.7 | 16.0 |
| 88 | | | | | | | | | | | 14.9 |
| 92 | | | | | | | | | | | 13.3 |
| 96 | | | | | | | | | | | 12.8 |
| 100 | | | | | | | | | | | 10.0 |

LN^{77°}

TAB 50042.2 160t

75%
DIN
BS

LR1550
LN-操作

起伏式ジブ
ブーム角度 77°
クローラー長さ: 8.80m
クローラー中心距離: 8.50m
クローラーシュー幅: 1.50m
クレーン水平設置
センターカウンターウエイト 30t
風力 50n/m² (9m/sec)
カウンターウエイト 160t

定格荷重: (t)

作業半径、ブーム長さ: (m)

システム: LA 2419.10 LI 2116.10

仕様は変更になることがあります。

| 作業半径 | L-42 N-21 | L-42 N-28 | L-42 N-35 | L-42 N-42 | L-42 N-49 | L-42 N-56 | L-42 N-63 | L-42 N-70 | L-42 N-77 | L-42 N-84 | L-42 N-91 |
|------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| 22 | 100 | | | | | | | | | | |
| 24 | 91 | | | | | | | | | | |
| 26 | 84 | 81 | | | | | | | | | |
| 28 | 77 | 76 | 73 | | | | | | | | |
| 30 | 71 | 70 | 68 | | | | | | | | |
| 32 | 65 | 65 | 64 | 62 | | | | | | | |
| 34 | | 60 | 59 | 58 | 56 | | | | | | |
| 36 | | 56 | 55 | 55 | 53 | 47 | | | | | |
| 38 | | 52 | 52 | 51 | 50 | 45.5 | | | | | |
| 40 | | 49 | 48.5 | 48 | 47.5 | 44.5 | 40 | | | | |
| 44 | | | 43 | 42.5 | 42 | 42 | 38 | 32 | | | |
| 48 | | | | 38.5 | 38 | 37.5 | 36 | 30.5 | 26.0 | 22.0 | |
| 52 | | | | 34.5 | 34 | 34 | 33 | 29.3 | 25.0 | 21.2 | 17.6 |
| 56 | | | | | 31 | 30.5 | 30 | 28.0 | 24.0 | 20.5 | 17.0 |
| 60 | | | | | 28.4 | 28.1 | 27.4 | 26.6 | 23.0 | 19.8 | 16.4 |
| 64 | | | | | | 25.8 | 25.1 | 24.6 | 22.1 | 19.1 | 15.8 |
| 68 | | | | | | 22.4 | 23.1 | 22.6 | 21.2 | 18.5 | 15.2 |
| 72 | | | | | | | 21.4 | 20.9 | 19.8 | 17.8 | 14.6 |
| 76 | | | | | | | | 19.3 | 18.3 | 17.2 | 14.0 |
| 80 | | | | | | | | 18.0 | 16.9 | 16.3 | 13.4 |
| 84 | | | | | | | | | 15.7 | 15.0 | 12.8 |
| 88 | | | | | | | | | 14.7 | 13.9 | 12.3 |
| 92 | | | | | | | | | | 12.9 | 11.9 |
| 96 | | | | | | | | | | | 11.1 |
| 100 | | | | | | | | | | | 10.3 |
| 104 | | | | | | | | | | | |

| 作業半径 | L-49 N-21 | L-49 N-28 | L-49 N-35 | L-49 N-42 | L-49 N-49 | L-49 N-56 | L-49 N-63 | L-49 N-70 | L-49 N-77 | L-49 N-84 | L-49 N-91 |
|------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| 22 | 86 | | | | | | | | | | |
| 24 | 80 | | | | | | | | | | |
| 26 | 74 | 71 | | | | | | | | | |
| 28 | 69 | 67 | 65 | | | | | | | | |
| 30 | | | | | | | | | | | |
| 32 | 64 | 63 | 61 | 59 | | | | | | | |
| 34 | 59 | 59 | 57 | 55 | | | | | | | |
| 36 | | 55 | 54 | 52 | 50 | | | | | | |
| 38 | | 51 | 51 | 49 | 47.5 | 42 | | | | | |
| 40 | | 48 | 47.5 | 46.5 | 45 | 41 | | | | | |
| 44 | | | 42 | 41.5 | 41 | 39 | 34 | 30.0 | | | |
| 48 | | | 38 | 37.5 | 37 | 36 | 32.5 | 28.6 | 24.3 | | |
| 52 | | | | 33.5 | 33.5 | 33 | 30.5 | 27.2 | 23.4 | 19.2 | 16.0 |
| 56 | | | | 30.5 | 30 | 29.9 | 29.2 | 25.9 | 22.5 | 18.5 | 15.4 |
| 60 | | | | | 27.7 | 27.3 | 26.6 | 24.7 | 21.6 | 17.9 | 14.8 |
| 64 | | | | | | 25.1 | 24.4 | 23.3 | 20.8 | 17.3 | 14.2 |
| 68 | | | | | | 23.1 | 22.4 | 21.4 | 20.0 | 16.7 | 13.7 |
| 72 | | | | | | | 20.8 | 19.7 | 19.0 | 16.1 | 13.2 |
| 76 | | | | | | | 19.3 | 18.2 | 17.5 | 15.6 | 12.8 |
| 80 | | | | | | | | 16.9 | 16.1 | 15.1 | 12.4 |
| 84 | | | | | | | | | 15.0 | 13.9 | 12.0 |
| 88 | | | | | | | | | 13.9 | 12.9 | 11.6 |
| 92 | | | | | | | | | | 11.9 | 11.0 |
| 96 | | | | | | | | | | | 10.1 |
| 100 | | | | | | | | | | | 9.4 |
| 104 | | | | | | | | | | | 8.8 |

LIEBHERR LR-1550

LN^{77°}

TAB 50042.3 160t

75 %
DIN
BS

LR1550
LN-操作

起伏式ジブ
ブーム角度77°
クローラー長さ: 8.80m
クローラー中心距離: 8.50m
クローラーシュー幅: 1.50m
クレーン水平設置
センターカウンターウエイト 30t
風力 50n/m² (9m/sec)
カウンターウエイト 160t

| 作業半径 | L-56 N-21 | L-56 N-28 | L-56 N-35 | L-56 N-42 | L-56 N-49 | L-56 N-56 | L-56 N-63 | L-56 N-70 | L-56 N-77 | L-56 N-84 | L-56 N-91 |
|------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| 26 | 76 | | | | | | | | | | |
| 28 | 70 | | | | | | | | | | |
| 30 | 66 | 66 | | | | | | | | | |
| 32 | 62 | 59 | 58 | | | | | | | | |
| 34 | 58 | 56 | 54 | 52 | | | | | | | |
| 36 | 54 | 53 | 51 | 49.5 | | | | | | | |
| 38 | | 50 | 48.5 | 47 | 45 | | | | | | |
| 40 | | 47 | 46 | 44.5 | 43 | 38.5 | | | | | |
| 44 | | | 41.5 | 40.5 | 39 | 36.5 | 32 | | | | |
| 48 | | | 37 | 36.5 | 35 | 34 | 30.5 | 26.0 | 22.4 | | |
| 52 | | | | 33 | 32.5 | 31.5 | 29.0 | 24.9 | 21.6 | 18.0 | |
| 56 | | | | 30 | 29.7 | 28.6 | 27.5 | 23.8 | 20.8 | 17.3 | 14.0 |
| 60 | | | | | 27.1 | 26.1 | 25.2 | 22.7 | 20.0 | 16.7 | 13.4 |
| 64 | | | | | 24.9 | 23.9 | 23.1 | 21.7 | 19.3 | 16.1 | 12.9 |
| 68 | | | | | | 22.1 | 21.2 | 20.1 | 18.6 | 15.5 | 12.4 |
| 72 | | | | | | | 19.6 | 18.5 | 17.8 | 14.9 | 11.9 |
| 76 | | | | | | | 18.2 | 17.1 | 16.3 | 14.4 | 11.4 |
| 80 | | | | | | | | 15.8 | 15.1 | 13.8 | 11.0 |
| 84 | | | | | | | | 14.7 | 13.9 | 12.9 | 10.6 |
| 88 | | | | | | | | | 12.9 | 11.8 | 10.2 |
| 92 | | | | | | | | | 12.0 | 10.9 | 9.8 |
| 96 | | | | | | | | | | 10.1 | 9.1 |
| 100 | | | | | | | | | | | 8.4 |
| 104 | | | | | | | | | | | 7.7 |

定格荷重: (t)
作業半径、ブーム長さ: (m)

システム: LA 2419.10 LI 2116.10

仕様は変更になることがあります。

| 作業半径 | L-63 N-28 | L-63 N-35 | L-63 N-42 | L-63 N-49 | L-63 N-56 | L-63 N-63 | L-63 N-70 | L-63 N-77 | L-63 N-84 | L-63 N-91 |
|------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| 26 | | | | | | | | | | |
| 28 | | | | | | | | | | |
| 30 | 60 | | | | | | | | | |
| 32 | 56 | | | | | | | | | |
| 34 | 53 | 51 | | | | | | | | |
| 36 | 50 | 48.5 | 46 | | | | | | | |
| 38 | 47.5 | 46 | 44 | | | | | | | |
| 40 | 45 | 43.5 | 41.5 | 38 | | | | | | |
| 44 | 41 | 39.5 | 38 | 36 | 32 | 28.0 | | | | |
| 48 | | 36.5 | 34.5 | 33.5 | 30.0 | 26.7 | 23.2 | | | |
| 52 | | 33 | 31.5 | 30.5 | 28.6 | 25.3 | 22.0 | 19.5 | | |
| 56 | | | 28.9 | 28.0 | 27.0 | 24.0 | 21.0 | 18.7 | 14.7 | 12.0 |
| 60 | | | | 25.6 | 24.9 | 22.6 | 20.0 | 17.9 | 14.0 | 11.5 |
| 64 | | | | 23.5 | 22.8 | 21.4 | 19.0 | 17.0 | 13.4 | 11.0 |
| 68 | | | | | 21.0 | 19.8 | 18.0 | 16.2 | 12.8 | 10.5 |
| 72 | | | | | 19.5 | 18.2 | 16.9 | 15.3 | 12.2 | 10.0 |
| 76 | | | | | | 16.9 | 15.7 | 14.5 | 11.6 | 9.5 |
| 80 | | | | | | 15.8 | 14.5 | 13.7 | 11.1 | 9.0 |
| 84 | | | | | | | 13.5 | 12.7 | 10.8 | 8.5 |
| 88 | | | | | | | | 11.7 | 10.2 | 8.1 |
| 92 | | | | | | | | 10.9 | 9.7 | 7.6 |
| 96 | | | | | | | | | 9.0 | 7.1 |
| 100 | | | | | | | | | 8.4 | 6.6 |
| 104 | | | | | | | | | | 6.1 |

LN^{77°}

TAB 50042.4 160t

75 %
DIN
BS

LR1550
LN-操作

起伏式ジブ
ブーム角度77°
クローラー長さ: 8.80m
クローラー中心距離: 8.50m
クローラーシュー幅: 1.50m
クレーン水平設置
センターカウンターウエイト 30t
風力 50n/m² (9m/sec)
カウンターウエイト 160t

定格荷重: (t)
作業半径、ブーム長さ: (m)

システム: LA 2419.10 LI 2116.10

仕様は変更になることがあります。

| 作業半径 | L-70 N-28 | L-70 N-35 | L-70 N-42 | L-70 N-49 | L-70 N-56 | L-70 N-63 | L-70 N-70 | L-70 N-77 | L-70 N-84 | L-70 N-91 |
|------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| 32 | 52 | | | | | | | | | |
| 34 | 49.5 | 44 | | | | | | | | |
| 36 | 47 | 43 | | | | | | | | |
| 38 | 44.5 | 41.5 | 37.5 | | | | | | | |
| 40 | 42 | 40 | 36.5 | 32.5 | | | | | | |
| 44 | 38.5 | 37 | 34.5 | 30.0 | 27.4 | | | | | |
| 48 | | 34 | 32.5 | 29.1 | 26.0 | 22.6 | 19.0 | | | |
| 52 | | 31.5 | 30.0 | 27.5 | 24.7 | 21.8 | 18.2 | 15.0 | | |
| 56 | | | 27.5 | 25.8 | 23.4 | 20.6 | 17.4 | 14.3 | 11.6 | |
| 60 | | | 25.2 | 23.9 | 22.0 | 19.6 | 16.6 | 13.7 | 11.1 | 9.2 |
| 64 | | | | 22.0 | 20.7 | 18.6 | 15.8 | 13.1 | 10.7 | 8.7 |
| 68 | | | | | 19.4 | 17.6 | 15.0 | 12.5 | 10.2 | 8.3 |
| 72 | | | | | 18.1 | 16.6 | 14.2 | 11.9 | 9.7 | 8.0 |
| 76 | | | | | | 15.5 | 13.5 | 11.3 | 9.3 | 7.6 |
| 80 | | | | | | 14.4 | 12.7 | 10.7 | 8.8 | 7.2 |
| 84 | | | | | | | 11.9 | 10.1 | 8.3 | 6.8 |
| 88 | | | | | | | 11.2 | 9.5 | 7.9 | 6.4 |
| 92 | | | | | | | | 8.9 | 7.5 | 6.0 |
| 96 | | | | | | | | | 7.0 | 5.6 |
| 100 | | | | | | | | | 6.6 | 5.2 |
| 104 | | | | | | | | | | 4.8 |
| 108 | | | | | | | | | | 4.4 |

| 作業半径 | L-77 N-28 | L-77 N-35 | L-77 N-42 | L-77 N-49 | L-77 N-56 | L-77 N-63 | L-77 N-70 | L-77 N-77 | L-77 N-84 | L-77 N-91 |
|------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| 32 | | | | | | | | | | |
| 34 | 44 | | | | | | | | | |
| 36 | 42.5 | 38 | | | | | | | | |
| 38 | 41.5 | 37 | | | | | | | | |
| 40 | 39.5 | 36 | 32 | | | | | | | |
| 44 | 36 | 34 | 30.5 | 27.0 | | | | | | |
| 48 | 33 | 32 | 29.2 | 25.8 | 22.2 | 19.0 | | | | |
| 52 | | 29.3 | 27.7 | 24.6 | 21.4 | 18.3 | 15.4 | | | |
| 56 | | | 25.5 | 23.4 | 20.6 | 17.7 | 14.9 | 12.0 | 10.0 | |
| 60 | | | 23.4 | 22.2 | 19.8 | 17.1 | 14.4 | 11.6 | 9.6 | 7.2 |
| 64 | | | | 20.7 | 18.9 | 16.4 | 13.9 | 11.3 | 9.3 | 6.9 |
| 68 | | | | 19.1 | 16.0 | 13.5 | 10.9 | 8.9 | 7.0 | 6.7 |
| 72 | | | | | 16.6 | 15.2 | 13.0 | 10.5 | 8.7 | 6.4 |
| 76 | | | | | 15.4 | 14.5 | 12.5 | 10.2 | 8.4 | 6.2 |
| 80 | | | | | | 13.3 | 12.0 | 9.8 | 8.1 | 5.9 |
| 84 | | | | | | | 11.2 | 9.5 | 7.8 | 5.7 |
| 88 | | | | | | | 10.3 | 9.1 | 7.5 | 5.4 |
| 92 | | | | | | | | 8.3 | 7.2 | 5.1 |
| 96 | | | | | | | | 7.6 | 6.8 | 4.8 |
| 100 | | | | | | | | | 6.5 | 4.5 |
| 104 | | | | | | | | | 6.1 | 4.2 |
| 108 | | | | | | | | | | 4.0 |

LIEBHERR LR-1550

LN^{67°}

TAB 50046.1 160t

75 %
DIN
BS

LR1550
LN-操作

起伏式ジブ
ブーム角度 67°
クローラー長さ: 8.80m
クローラー中心距離: 8.50m
クローラーシュー幅: 1.50m
クレーン水平設置
センターカウンターウエイト 30t
風力 50n/m² (9m/sec)
カウンターウエイト 160t

定格荷重: (t)
作業半径、ブーム長さ: (m)

システム: LA 2419.10 LI 2116.10

仕様は変更になることがあります。

| 作業半径 | L-28 N-21 | L-28 N-28 | L-28 N-35 | L-28 N-42 | L-28 N-49 | L-28 N-56 | L-28 N-63 | L-28 N-70 | L-28 N-77 | L-28 N-84 | L-28 N-91 |
|------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| 28 | 76 | | | | | | | | | | |
| 30 | 70 | | | | | | | | | | |
| 32 | 65 | 64 | | | | | | | | | |
| 34 | 60 | 59 | | | | | | | | | |
| 36 | | 55 | 55 | | | | | | | | |
| 38 | | 52 | 51 | 51 | | | | | | | |
| 40 | | 48.5 | 48 | 47.5 | | | | | | | |
| 44 | | | 42.5 | 42 | 41.5 | | | | | | |
| 48 | | | 38.5 | 37.5 | 37 | 36.5 | | | | | |
| 52 | | | | 34 | 33.5 | 33 | 32.5 | | | | |
| 56 | | | | 31 | 30.5 | 30 | 29.6 | 29.2 | | | |
| 60 | | | | | 28.0 | 27.5 | 27.0 | 26.6 | 25.9 | | |
| 64 | | | | | | 25.3 | 24.8 | 24.4 | 23.7 | 21.8 | |
| 68 | | | | | | 23.4 | 22.8 | 22.4 | 21.7 | 21.3 | 17.6 |
| 72 | | | | | | | 21.1 | 20.7 | 20.0 | 19.5 | 17.0 |
| 76 | | | | | | | 19.6 | 19.2 | 18.5 | 18.0 | 16.5 |
| 80 | | | | | | | | 17.8 | 17.1 | 16.6 | 15.7 |
| 84 | | | | | | | | 16.6 | 15.9 | 15.3 | 14.4 |
| 88 | | | | | | | | | 14.8 | 14.2 | 13.3 |
| 92 | | | | | | | | | | 13.2 | 12.3 |
| 96 | | | | | | | | | | 12.3 | 11.4 |
| 100 | | | | | | | | | | | 10.6 |
| 104 | | | | | | | | | | | 9.9 |

| 作業半径 | L-35 N-21 | L-35 N-28 | L-35 N-35 | L-35 N-42 | L-35 N-49 | L-35 N-56 | L-35 N-63 | L-35 N-70 | L-35 N-77 | L-35 N-84 | L-35 N-91 |
|------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| 28 | | | | | | | | | | | |
| 30 | 68 | | | | | | | | | | |
| 32 | 63 | | | | | | | | | | |
| 34 | 58 | 57 | | | | | | | | | |
| 36 | 54 | 53 | | | | | | | | | |
| 38 | 51 | 50 | 49.5 | | | | | | | | |
| 40 | | 47 | 46.5 | | | | | | | | |
| 44 | | 41.5 | 41 | 40.5 | 35.5 | | | | | | |
| 48 | | | 37 | 36.5 | 32 | 32 | | | | | |
| 52 | | | 33.5 | 33 | 29.3 | 28.9 | 28.4 | 27.9 | | | |
| 56 | | | | 29.9 | 26.8 | 26.4 | 25.9 | 25.4 | 24.4 | | |
| 60 | | | | | 24.7 | 24.2 | 23.7 | 23.3 | 22.2 | 20.4 | |
| 64 | | | | | | 22.3 | 21.8 | 21.4 | 20.3 | 19.7 | 16.2 |
| 68 | | | | | | 20.7 | 20.1 | 19.7 | 18.6 | 18.0 | 15.9 |
| 72 | | | | | | | 18.7 | 18.2 | 17.1 | 16.5 | 15.5 |
| 76 | | | | | | | 17.4 | 16.9 | 15.8 | 15.1 | 14.2 |
| 80 | | | | | | | | 15.7 | 14.6 | 13.9 | 13.0 |
| 84 | | | | | | | | | 13.6 | 12.9 | 11.9 |
| 88 | | | | | | | | | 12.7 | 11.9 | 11.0 |
| 92 | | | | | | | | | | 11.0 | 10.1 |
| 96 | | | | | | | | | | 10.3 | 9.3 |
| 100 | | | | | | | | | | | 8.7 |
| 104 | | | | | | | | | | | |

LN^{67°}

TAB 50046.2 160t

75 %
DIN
BS

LR1550
LN-操作

起伏式ジブ
ブーム角度 67°
クローラー長さ: 8.80m
クローラー中心距離: 8.50m
クローラーシュー幅: 1.50m
クレーン水平設置
センターカウンターウエイト 30t
風力 50n/m² (9m/sec)
カウンターウエイト 160t

定格荷重: (t)
作業半径、ブーム長さ: (m)

システム: LA 2419.10 LI 2116.10

仕様は変更になることがあります。

| 作業半径 | L-42 N-21 | L-42 N-28 | L-42 N-35 | L-42 N-42 | L-42 N-49 | L-42 N-56 | L-42 N-63 | L-42 N-70 | L-42 N-77 | L-42 N-84 | L-42 N-91 |
|------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| 32 | 61 | | | | | | | | | | |
| 34 | 56 | | | | | | | | | | |
| 36 | 52 | 52 | | | | | | | | | |
| 38 | 49 | 48 | | | | | | | | | |
| 40 | 46 | 45.5 | 44.5 | | | | | | | | |
| 44 | | 40 | 39.5 | 39 | 34.5 | | | | | | |
| 48 | | 36 | 35.5 | 35 | 31.5 | 30.5 | | | | | |
| 52 | | | 32 | 31.5 | 28.7 | 28.2 | 26.8 | | | | |
| 56 | | | | 28.7 | 25.8 | 25.4 | 24.4 | 23.6 | | | |
| 60 | | | | 26.3 | | | | | | | |
| 64 | | | | | 23.7 | 23.3 | 22.3 | 21.5 | 20.1 | | |
| 68 | | | | | 21.8 | 21.4 | 20.4 | 19.7 | 18.5 | 17.9 | |
| 72 | | | | | | 19.8 | 18.8 | 18.0 | 16.9 | 16.3 | 14.8 |
| 76 | | | | | | | 17.4 | 16.6 | 15.5 | 14.9 | 13.9 |
| 80 | | | | | | | 16.2 | 15.4 | 14.3 | 13.6 | 12.6 |
| 84 | | | | | | | | 14.3 | 13.1 | 12.4 | 11.5 |
| 88 | | | | | | | | 13.3 | 12.1 | 11.4 | 10.5 |
| 92 | | | | | | | | | 11.3 | 10.5 | 9.6 |
| 96 | | | | | | | | | 10.6 | 9.7 | 8.7 |
| 100 | | | | | | | | | | 9.0 | 8.0 |
| 104 | | | | | | | | | | | 7.3 |
| 108 | | | | | | | | | | | 6.9 |
| 112 | | | | | | | | | | | |

| 作業半径 | L-49 N-21 | L-49 N-28 | L-49 N-35 | L-49 N-42 | L-49 N-49 | L-49 N-56 | L-49 N-63 | L-49 N-70 | L-49 N-77 | L-49 N-84 | L-49 N-91 |
|------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| 32 | | | | | | | | | | | |
| 34 | | | | | | | | | | | |
| 36 | 50 | | | | | | | | | | |
| 38 | 47 | | | | | | | | | | |
| 40 | 44 | 43 | | | | | | | | | |
| 44 | | 38.5 | 38 | | | | | | | | |
| 48 | | 34.5 | 34 | 33 | | | | | | | |
| 52 | | | 30.5 | 30.0 | 29.4 | | | | | | |
| 56 | | | 27.9 | 27.2 | 26.6 | 25.9 | | | | | |
| 60 | | | | 24.9 | 24.3 | 23.5 | 22.6 | | | | |
| 64 | | | | 22.9 | 22.3 | 21.5 | 20.6 | 19.5 | | | |
| 68 | | | | | 20.6 | 19.8 | 18.9 | 17.8 | 17.0 | | |
| 72 | | | | | | 18.2 | 17.4 | 16.2 | 15.5 | 14.4 | |
| 76 | | | | | | 16.9 | 16.0 | 14.9 | 14.2 | 13.1 | 12.1 |
| 80 | | | | | | | 14.8 | 13.7 | 12.9 | 11.9 | 10.9 |
| 84 | | | | | | | 13.8 | 12.6 | 11.8 | 10.8 | 9.8 |
| 88 | | | | | | | | 11.7 | 10.9 | 9.8 | 8.9 |
| 92 | | | | | | | | 11.0 | 10.0 | 9.0 | 8.0 |
| 96 | | | | | | | | | 9.3 | 8.2 | 7.2 |
| 100 | | | | | | | | | | 7.5 | 6.6 |
| 104 | | | | | | | | | | 7.0 | 6.1 |
| 108 | | | | | | | | | | | 5.6 |
| 112 | | | | | | | | | | | 5.3 |

LIEBHERR LR-1550

LN^{67°}

TAB 50046.3 160t

75%
DIN
BS

LR1550
LN-操作

起伏式ジブ
ブーム角度 67°
クローラー長さ: 8.80m
クローラー中心距離: 8.50m
クローラーシュー幅: 1.50m
クレーン水平設置
センターカウンターウエイト 30t
風力 50n/m² (9m/sec)
カウンターウエイト 160t

定格荷重: (t)
作業半径、ブーム長さ: (m)
システム: LA 2419.10 LI 2116.10

仕様は変更になることがあります。

| 作業半径 | L-56 N-21 | L-56 N-28 | L-56 N-35 | L-56 N-42 | L-56 N-49 | L-56 N-56 | L-56 N-63 | L-56 N-70 | L-56 N-77 | L-56 N-84 | L-56 N-91 |
|------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| 38 | 45 | | | | | | | | | | |
| 40 | 42 | | | | | | | | | | |
| 44 | 37.5 | 37 | | | | | | | | | |
| 48 | | 33 | 32.5 | | | | | | | | |
| 52 | | 29.8 | 29.3 | 28.4 | | | | | | | |
| 56 | | | 26.6 | 25.7 | 24.8 | | | | | | |
| 60 | | | 24.4 | 23.5 | 22.6 | 21.5 | | | | | |
| 64 | | | | 21.6 | 20.6 | 19.6 | 18.7 | | | | |
| 68 | | | | | 19.0 | 17.9 | 17.0 | 15.8 | | | |
| 72 | | | | | 17.6 | 16.5 | 15.6 | 14.4 | 13.6 | | |
| 76 | | | | | | 15.2 | 14.3 | 13.1 | 12.3 | 11.2 | |
| 80 | | | | | | 14.2 | 13.1 | 12.0 | 11.2 | 10.1 | 9.1 |
| 84 | | | | | | | 12.2 | 11.0 | 10.2 | 9.1 | 8.0 |
| 88 | | | | | | | 11.4 | 10.1 | 9.3 | 8.2 | 7.2 |
| 92 | | | | | | | | 9.4 | 8.5 | 7.4 | 6.5 |
| 96 | | | | | | | | | 7.7 | 6.8 | 5.9 |
| 100 | | | | | | | | | 7.2 | 6.2 | 5.4 |
| 104 | | | | | | | | | | 5.8 | 4.9 |
| 108 | | | | | | | | | | 5.4 | 4.4 |
| 112 | | | | | | | | | | 5.4 | 4.1 |
| 116 | | | | | | | | | | | 3.8 |

| 作業半径 | L-63 N-28 | L-63 N-35 | L-63 N-42 | L-63 N-49 | L-63 N-56 | L-63 N-63 | L-63 N-70 | L-63 N-77 | L-63 N-84 | L-63 N-91 |
|------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| 38 | | | | | | | | | | |
| 40 | | | | | | | | | | |
| 44 | | | | | | | | | | |
| 48 | 31 | | | | | | | | | |
| 52 | 28.1 | 27.1 | 25.5 | | | | | | | |
| 56 | 25.6 | 24.6 | 23.2 | 22.3 | | | | | | |
| 60 | | 22.5 | 21.1 | 20.2 | 19.5 | | | | | |
| 64 | | | 18.3 | 18.4 | 17.7 | 16.4 | | | | |
| 68 | | | 17.8 | 16.9 | 16.1 | 14.8 | 13.5 | | | |
| 72 | | | | 15.5 | 14.8 | 13.5 | 12.2 | 11.4 | | |
| 76 | | | | 14.4 | 13.5 | 12.3 | 11.0 | 10.3 | 9.1 | |
| 80 | | | | | 12.5 | 11.2 | 10.0 | 9.2 | 8.0 | 7.5 |
| 84 | | | | | | 10.3 | 9.1 | 8.3 | 7.1 | 6.7 |
| 88 | | | | | | 9.5 | 8.3 | 7.4 | 6.5 | 6.0 |
| 92 | | | | | | | 7.5 | 6.8 | 5.9 | 5.4 |
| 96 | | | | | | | 7.0 | 6.3 | 5.3 | 4.9 |
| 100 | | | | | | | | 5.8 | 4.8 | 4.3 |
| 104 | | | | | | | | 5.4 | 4.4 | 3.9 |
| 108 | | | | | | | | | 4.0 | 3.5 |
| 112 | | | | | | | | | | 3.1 |
| 116 | | | | | | | | | | 2.8 |

LN^{67°}

TAB 50046.4 160t

75%
DIN
BS

LR1550
LN-操作

起伏式ジブ
ブーム角度 67°
クローラー長さ: 8.80m
クローラー中心距離: 8.50m
クローラーシュー幅: 1.50m
クレーン水平設置
センターカウンターウエイト 30t
風力 50n/m² (9m/sec)
カウンターウエイト 160t

定格荷重: (t)
作業半径、ブーム長さ: (m)
システム: LA 2419.10 LI 2116.10

仕様は変更になることがあります。

| 作業半径 | L-70 N-28 | L-70 N-35 | L-70 N-42 | L-70 N-49 | L-70 N-56 | L-70 N-63 | L-70 N-70 | L-70 N-77 | L-70 N-84 | L-70 N-91 |
|------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| 48 | 27.5 | 24.1 | | | | | | | | |
| 52 | 25.2 | 22.0 | 20.9 | | | | | | | |
| 56 | 22.9 | 20.0 | 19.0 | 17.7 | | | | | | |
| 64 | | 18.4 | 17.3 | 16.0 | 15.3 | | | | | |
| 68 | | | 15.9 | 14.6 | 13.8 | 12.4 | | | | |
| 72 | | | 14.7 | 13.3 | 12.6 | 11.2 | 10.4 | | | |
| 76 | | | | 12.2 | 11.5 | 10.1 | 9.3 | 7.8 | | |
| 80 | | | | 11.5 | 10.5 | 9.2 | 8.3 | 7.1 | 6.1 | |
| 84 | | | | | 9.7 | 8.3 | 7.4 | 6.4 | 5.4 | 4.9 |
| 88 | | | | | | 7.5 | 6.8 | 5.8 | 4.8 | 4.3 |
| 92 | | | | | | 7.1 | 6.3 | 5.2 | 4.2 | 3.8 |
| 96 | | | | | | | 5.8 | 4.7 | 3.8 | 3.3 |
| 100 | | | | | | | 5.4 | 4.3 | 3.3 | 2.9 |
| 104 | | | | | | | | 3.9 | 2.9 | 2.5 |
| 108 | | | | | | | | | 2.6 | 2.1 |
| 112 | | | | | | | | | 2.3 | |

| 作業半径 | L-77 N-28 | L-77 N-35 | L-77 N-42 | L-77 N-49 | L-77 N-56 | L-77 N-63 | L-77 N-70 | L-77 N-77 | L-77 N-84 |
|------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| 48 | | | | | | | | | |
| 52 | 22.3 | | | | | | | | |
| 56 | 20.4 | 19.5 | | | | | | | |
| 60 | 18.6 | 17.7 | 16.3 | | | | | | |
| 64 | | 16.2 | 14.8 | 13.8 | | | | | |
| 68 | | 14.9 | 13.4 | 12.5 | 11.3 | | | | |
| 72 | | | 12.3 | 11.3 | 10.1 | 9.2 | | | |
| 76 | | | | 10.3 | 9.1 | 8.2 | 6.9 | | |
| 80 | | | | 9.5 | 8.2 | 7.3 | 6.2 | 5.1 | |
| 84 | | | | | 7.5 | 6.7 | 5.6 | 4.5 | 4.0 |
| 88 | | | | | 7.0 | 6.1 | 5.0 | 4.0 | 3.5 |
| 92 | | | | | | 5.6 | 4.6 | 3.5 | 3.0 |
| 96 | | | | | | 5.3 | 4.1 | 3.1 | 2.6 |
| 100 | | | | | | | 3.8 | 2.7 | 2.2 |
| 104 | | | | | | | | 2.4 | |
| 108 | | | | | | | | 2.1 | |
| 112 | | | | | | | | | |