


仕様

29mジブ	定格荷重	10.0t	7.1t	5.3t		
	作業半径	3~16m	20m	25m		
34mジブ	定格荷重	10.0t	6.7t	5.0t	4.0t	
	作業半径	3~15m	20m	25m	30m	
39mジブ	定格荷重	8.0t	5.5t	4.3t	3.5t	3.0t
	作業半径	3~14m	20m	25m	30m	35m
速	巻上	高速	50HZ	45/90m/min	3/0t	
			60HZ	54/108m/min	3/0t	
		低速	50HZ	15/30m/min	8/0t	
			60HZ	18/36m/min	8/0t	
度	起伏	50HZ	109 sec			
		60HZ	109 sec			
	旋回	50HZ	0.65 rpm			
		60HZ	0.65 rpm			
昇降	50HZ	0.54 rpm				
	60HZ	0.65 rpm				
電	巻上	親	40 kw	6p	25%ED	
		子	22 kw	4p	CONT	
	動	起伏	15 kw	4p	CONT	
		旋回	5.5 kw	4p	CONT	
機	昇降	5.5 kw	4p	CONT		
	揚程	最大半径時	150m			
操	作	運転室内操作				
電	源	AC 400/440V 50/60HZ				
安	全装置	巻過防止装置, 起伏制限装置, 過負荷防止装置				

定格荷重線図

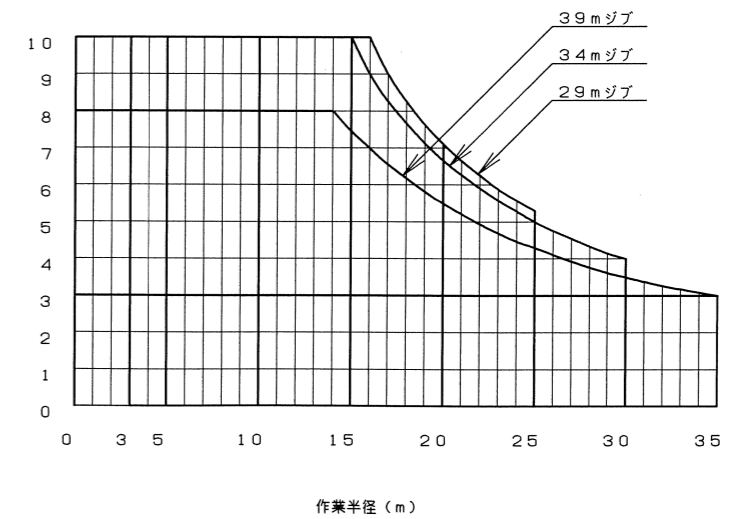

定格荷重 (t)

NOTE	DRAWN	中野	ITEM NO	CODE NO	ITEM	QUANTITY	MATERIAL	WEIGHT	REMARKS
	DESIGNED	橋本	ADMINISTRATE	DATE	SCALE	全体組立図			
	CHECKED	菊地		2007.10.23	1/100	MACHINE			
	APPROVED	三浦	OGAWA LTD.		OTS-120Nタータクレーン		CODE		
					036001565		B		